


LINDEN LC-8852 18t

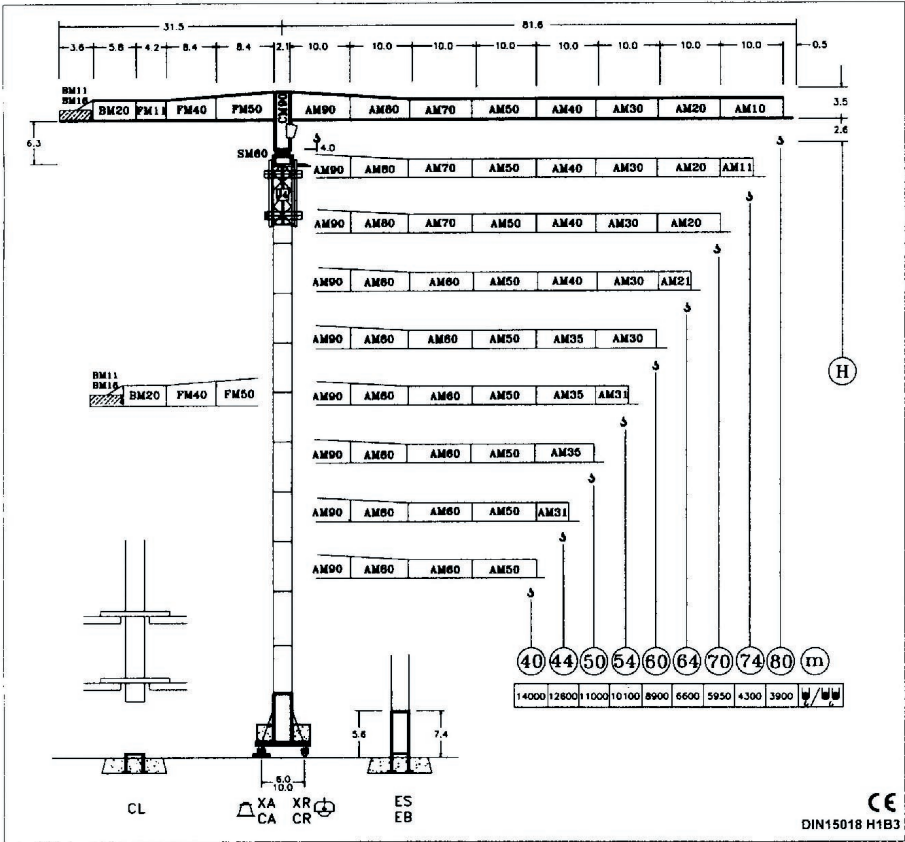

CE
DIN15018 H1B3

R	R _(Cmax)	C _{max}	30	34	40	44	50	54	60	64	70	74	80	
80	SR/DR	22,6	18000	13060	11300	9350	8340	7150	6500	5700	5250	4670	4340	3900
74	SR/DR	22,5	18000	12970	11220	9280	8280	7100	6450	5650	5210	4630	4300	
70	SR/DR	27,2	18000	16120	13980	11620	10400	8950	8170	7200	6650	5950		
64	SR/DR	27,0	18000	16010	13890	11530	10330	8890	8110	7140	6600			
60	SR/DR	32,4	18000	18000	17040	14190	12740	11010	10070	8900				
54	SR/DR	32,5	18000	18000	17090	14240	12780	11040	10100					
50	SR/DR	32,5	18000	18000	17030	14190	12730	11000						
44	SR/DR	32,1	18000	18000	16850	14040	12600							
40	SR/DR	32,0	18000	18000	16810	14000								

DS.9740.06 10/97 Reserva de modificaciones. - Subject to modifications. - Modifications réservées. - Konstruktionsänderungen vorbehalten.