



CE
DIN 15018 H1 B3

R	H				H								
	20,6	24	30	37,7	38,7	44	50	54	60	64	70	74	80
	18000	15175	11750	9000	9000	7825	6795	6240	5550	5160	4660	4375	4000
	18000	15170	11745	9000	38,9	44	50	54	60	64	70	74	
80					38,9	44	50	54	60	64	70	74	80
74					38,9	44	50	54	60	64	70	74	
70		25,6	30	34	40	46,9	49,1	54	60	64	70	74	
64		18000	15035	13045	10830	9000	9000	8115	7230	6735	6100	4400	
60		18000	14885	12915	10720	9000	9000	8070	7195	6700	kg		
50			30,7	34	40	44	50	56,5	60	64	70	74	
40			18000	16045	13370	12005	10375	9000	9000	kg			



DS.0346.32 09/05 Reserva de modificaciones.- Subject to modifications.- Modifications réservées.- Konstruktionsänderungen vorbehalten.

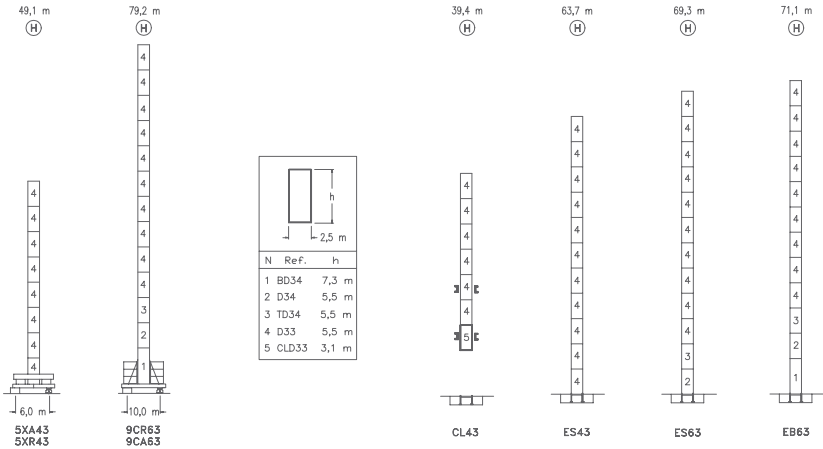

R. máx.	En servicio In operation En service In Betrieb	5XR43 150,0 t
		9CR63 111,0 t




R. máx.	Fuera de servicio Out of service Hors service Ausser Betrieb	5XR43 135,0 t
		9CR63 143,0 t

CFU-7.5
7,5 kW
0 \varnothing 94 m/min

GR-12
4 x 120 Nm
0 \varnothing 0,7 rpm

TRA-7.5
2 x 75 Nm
0 \varnothing 20 m/min

TRA-7.5VC
2 x 75 Nm
0 \varnothing 20 m/min



Tensión de alimentación Operating voltage Tension de service Betriebsspannung	400 V 3 ph 50 Hz
----------------------------------------------------------------------------------------	------------------------

Opcional Optional En option Kaufoption	*
-------------------------------------------------	---